


XD 20 SERIES DEHUMIDIFYING DRYERS**XD 20 ÷ XD 28****Features**

Model	Electrical power		Weight	
	kW	HP	kg	lb
XD 20	4,7	6,3	103	227
XD 21	4,7	6,3	103	227
XD 22	9,2	12,3	175	386
XD 23	9,2	12,3	175	386
XD 24	18,1	24,3	284	626
XD 25	18,1	24,3	284	626
XD 26	33,8	45,3	645	1422
XD 27	38,4	51,5	1050	2315
XD 28	42,9	57,5	1082	2385

Standard power supply: **400V/3ph/50Hz**

XD 20 SERIES DEHUMIDIFYING DRYERS

XD 20 ÷ XD 28

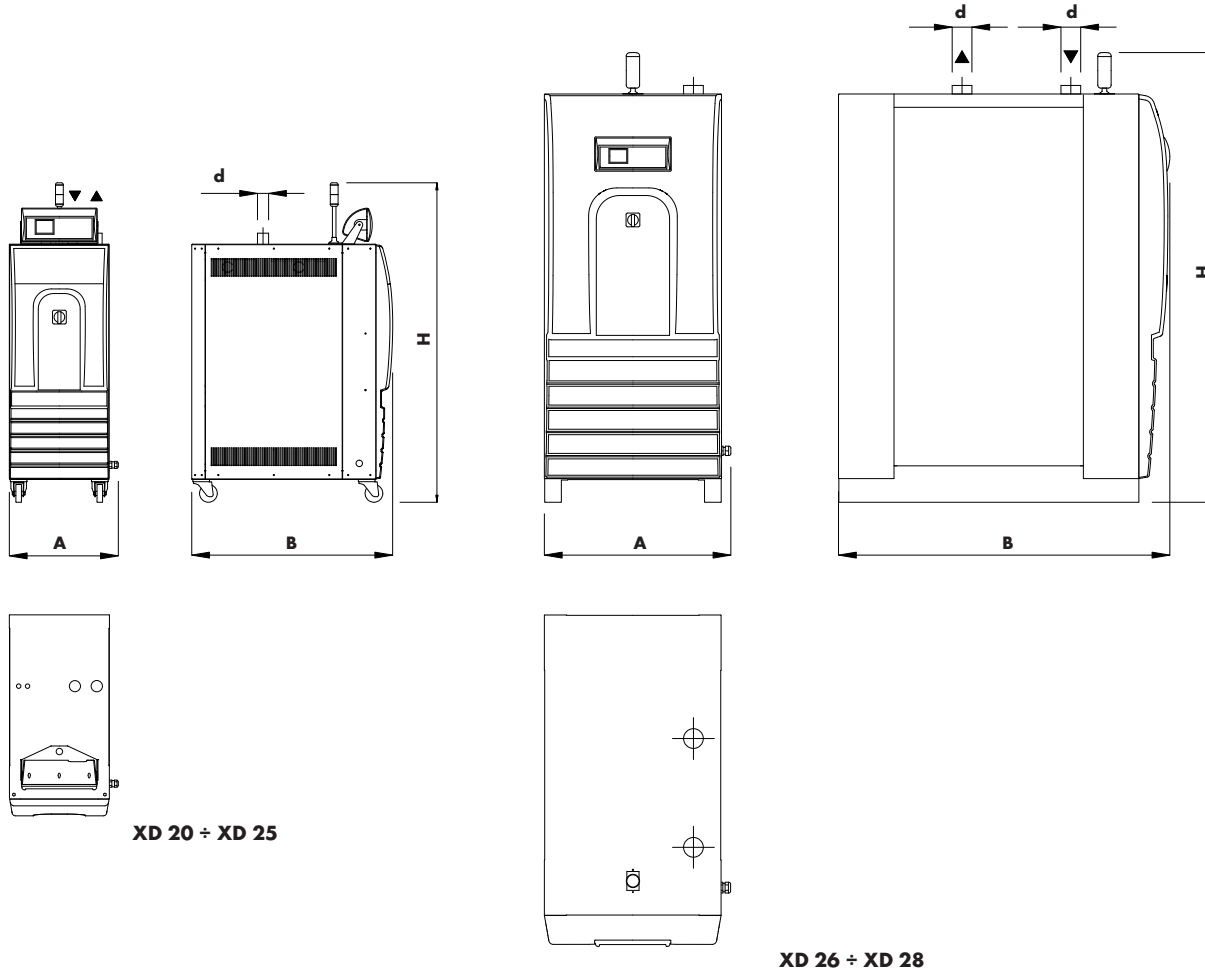

Dimensions

Model	A		B		H		d	
	mm	in	mm	in	mm	in	Ømm	Øin
XD 20	400	15,7	703	27,7	1249	49,2	50	1,97
XD 21	400	15,7	703	27,7	1249	49,2	50	1,97
XD 22	491	19,3	905	35,6	1439	56,7	50	1,97
XD 23	491	19,3	905	35,6	1439	56,7	50	1,97
XD 24	641	25,2	1150	45,3	1630	64,2	63	2,48
XD 25	641	25,2	1150	45,3	1630	64,2	63	2,48
XD 26	840	33,1	1484	58,4	2026	79,8	90	3,5
XD 27	1050	41,3	1833	72,2	2292	90,2	126	5,0
XD 28	1050	41,3	1833	72,2	2292	90,2	126	5,0